



Your bacteria's favorite!

Eppendorf Eporator®

eppendorf

Small footprint – great results!

Eppendorf Eporator®

Welcome the **Eppendorf Eporator®**, the solution for efficiently transforming bacteria and yeast! The Eppendorf Eporator is the perfect fit for you and your lab. Ask the specialists – your bacteria and yeast – they will confirm that the product features and performance of the Eppendorf Eporator make it very easy for you to carry out your experiments and obtain excellent results.

Electroporation can be used for the transformation of electrocompetent bacteria and yeast with DNA. Compared to chemical methods, electroporation yields a much higher transformation efficiency. It also gives more reproducible results than other methods, is very simple to perform and saves you valuable time.

Treat your bacteria and yeast with something special – let them experience the Eppendorf Eporator!

Fast and easy: simple one-button operation!



Unique features of the Eppendorf Eporator

- 1 Faster sample handling – simple one-button operation: just set the voltage or choose a preset parameter and insert a cuvette
- 2 Intuitive use – the status information on the colored display minimizes errors
- 3 Fast and freely programmable – two program buttons allow storage and recall of most commonly used parameters, default setting: P1 1,700 V and P2 2,500 V
- 4 Safe electronics* and integrated electroporation chamber eliminate voltage leaks and misuse
- 5 Compact, space-saving design for easy storage and transport
- 6 Easy, GLP-compliant documentation via USB port – data from your experiments can be exported for documentation and analysis

* U.S. Pat. 6,103,084.

The orange frame outlines the Eporator's 27.5 x 19 cm footprint (10.83 x 7.48 in)




As compact as can be!



The Eppendorf Eporator in full-scale:
fits in every lab as easily as on this page!

Plug and play

Comparison of transformation efficiencies of *E. coli*: heat shock vs. electroporation
(Mean values and standard deviations are shown)

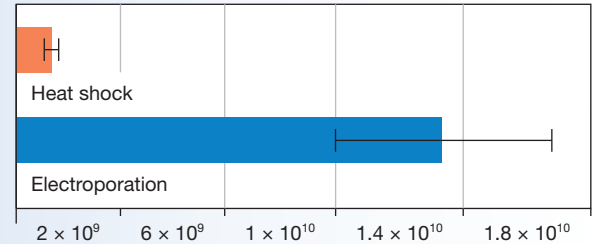


The Eppendorf Eporator was designed to deliver ideal conditions for electroporation of your bacteria and yeast, leading to transformation efficiencies far higher than with chemical transformation (heat shock).*

- 7 Set parameters** – displays your chosen voltage
- 8 Actual parameters** – actual voltage and time constant after the pulse are displayed
- 9 Function symbols** – indicate status of experiment

* Source: Eppendorf Application Note 216.



Easy documentation via USB port!

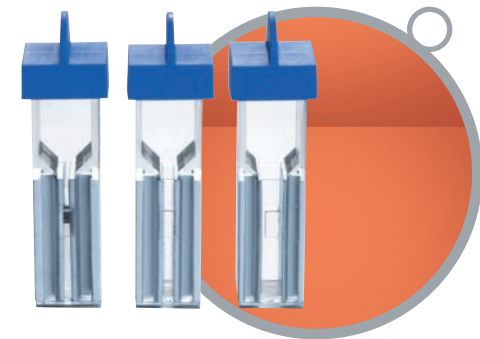

Individually blistered and gamma-irradiated Eppendorf electroporation cuvettes are available in three sizes and with different gap widths.

Where everything comes together

Lab success from one source

The Eppendorf Eporator fits perfectly into the Eppendorf product family for molecular and microbiology labs:


For example, the **Mastercycler® pro** can be used to amplify your gene of interest, the **BioPhotometer plus** helps you to determine the concentration of your DNA and the **Eppendorf Eporator®** transfers it into the bacterial strain or fungi you are working with.

Eppendorf offers a full range of products for up- and downstream processing of your samples:

- 1 Eppendorf's **BioPhotometer plus**, a compact UV/VIS photometer optimized for use in molecular biology, biochemistry labs.
- 2 The Eppendorf **Thermomixer® comfort*** conveniently offers simultaneous mixing and temperature control.
- 3 Eppendorf offers a complete range of **pipettes**.
- 4 Eppendorf's **PCR instruments and consumables**.
- 5 Eppendorf **electroporation cuvettes** are produced according to stringent quality standards.

Discover everything from Eppendorf at:
www.eppendorf.com

* Thermomixer® R in North America.

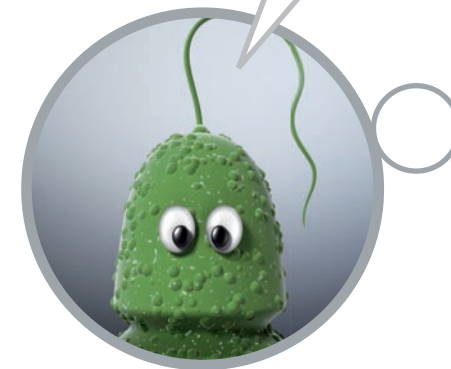

The Eppendorf Eporator® at a glance


Technical specifications

| Parameter | Values |
|--------------------------------|---|
| Input voltage: | 100 V–240 V ±10%, 50 Hz–60 Hz |
| Power input: | 20 W |
| Time constant: | 5 ms nominal |
| Output waveform: | Decaying exponential waveform with RC time constant of 5 ms |
| Pulse voltage: | 200 V–2,500 V |
| Charging time: | <10 s |
| Interface: | USB 2.0 |
| Dimensions (L x W x H): | 27.5 x 19 x 12.5 cm / 10.83 x 7.48 x 4.92 in. |
| Weight: | 3.2 kg / 7.05 lb |

Ordering information

| Description | Order No. International | Order No. North America |
|--|-------------------------|-------------------------|
| Eppendorf Eporator® Basic device incl. 5 x electroporation cuvettes, 1 mm gap and 5 x electroporation cuvettes, 2 mm gap | 4309 000.019 | |
| Accessories | | |
| Electroporation cuvettes, sterile, pack of 50 | | |
| 1 mm gap, 100 µl | 4307 000.569 | 940001005 |
| 2 mm gap, 400 µl | 4307 000.593 | 940001013 |
| 4 mm gap, 800 µl | 4307 000.623 | 940001021 |
| Cuvette holder for 16 cuvettes | 4308 078.006 | 940001102 |

Are you convinced?
Then try the Eppendorf
Eporator for yourself!

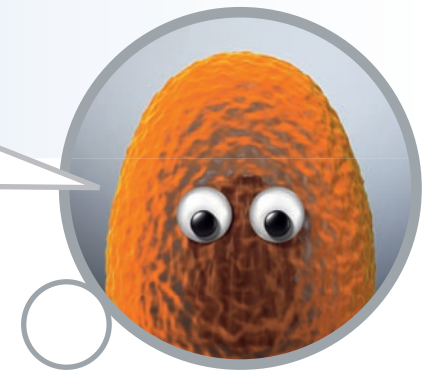

eppendorf
In touch with life

Your local distributor: www.eppendorf.com/worldwide

Eppendorf AG · 22331 Hamburg · Germany · Tel: +49 40 538 01-0 · Fax: +49 40 538 01-556 · E-mail: eppendorf@eppendorf.com
Eppendorf North America, Inc. · 102 Motor Parkway, Suite 410 · Hauppauge, N.Y. 11788-5178 · USA
Tel: +1 516 334 7500 · Toll free phone: +1 800 645 3050 · Fax: +1 516 334 7506 · E-mail: info@eppendorf.com

Application Support Europe, International: Tel: +49 1803 666 789 · E-mail: support@eppendorf.com
North America: Tel: +1 800 645 3050 menu option 2 · E-mail: techserv@eppendorf.com
Asia Pacific: Tel: +60 3 8023 6869 · E-mail: support_asiapacific@eppendorf.com